


# EPHY MESS

Gesellschaft für Elektro-Physikalische Meßgeräte mbH



## Electric Band Heaters

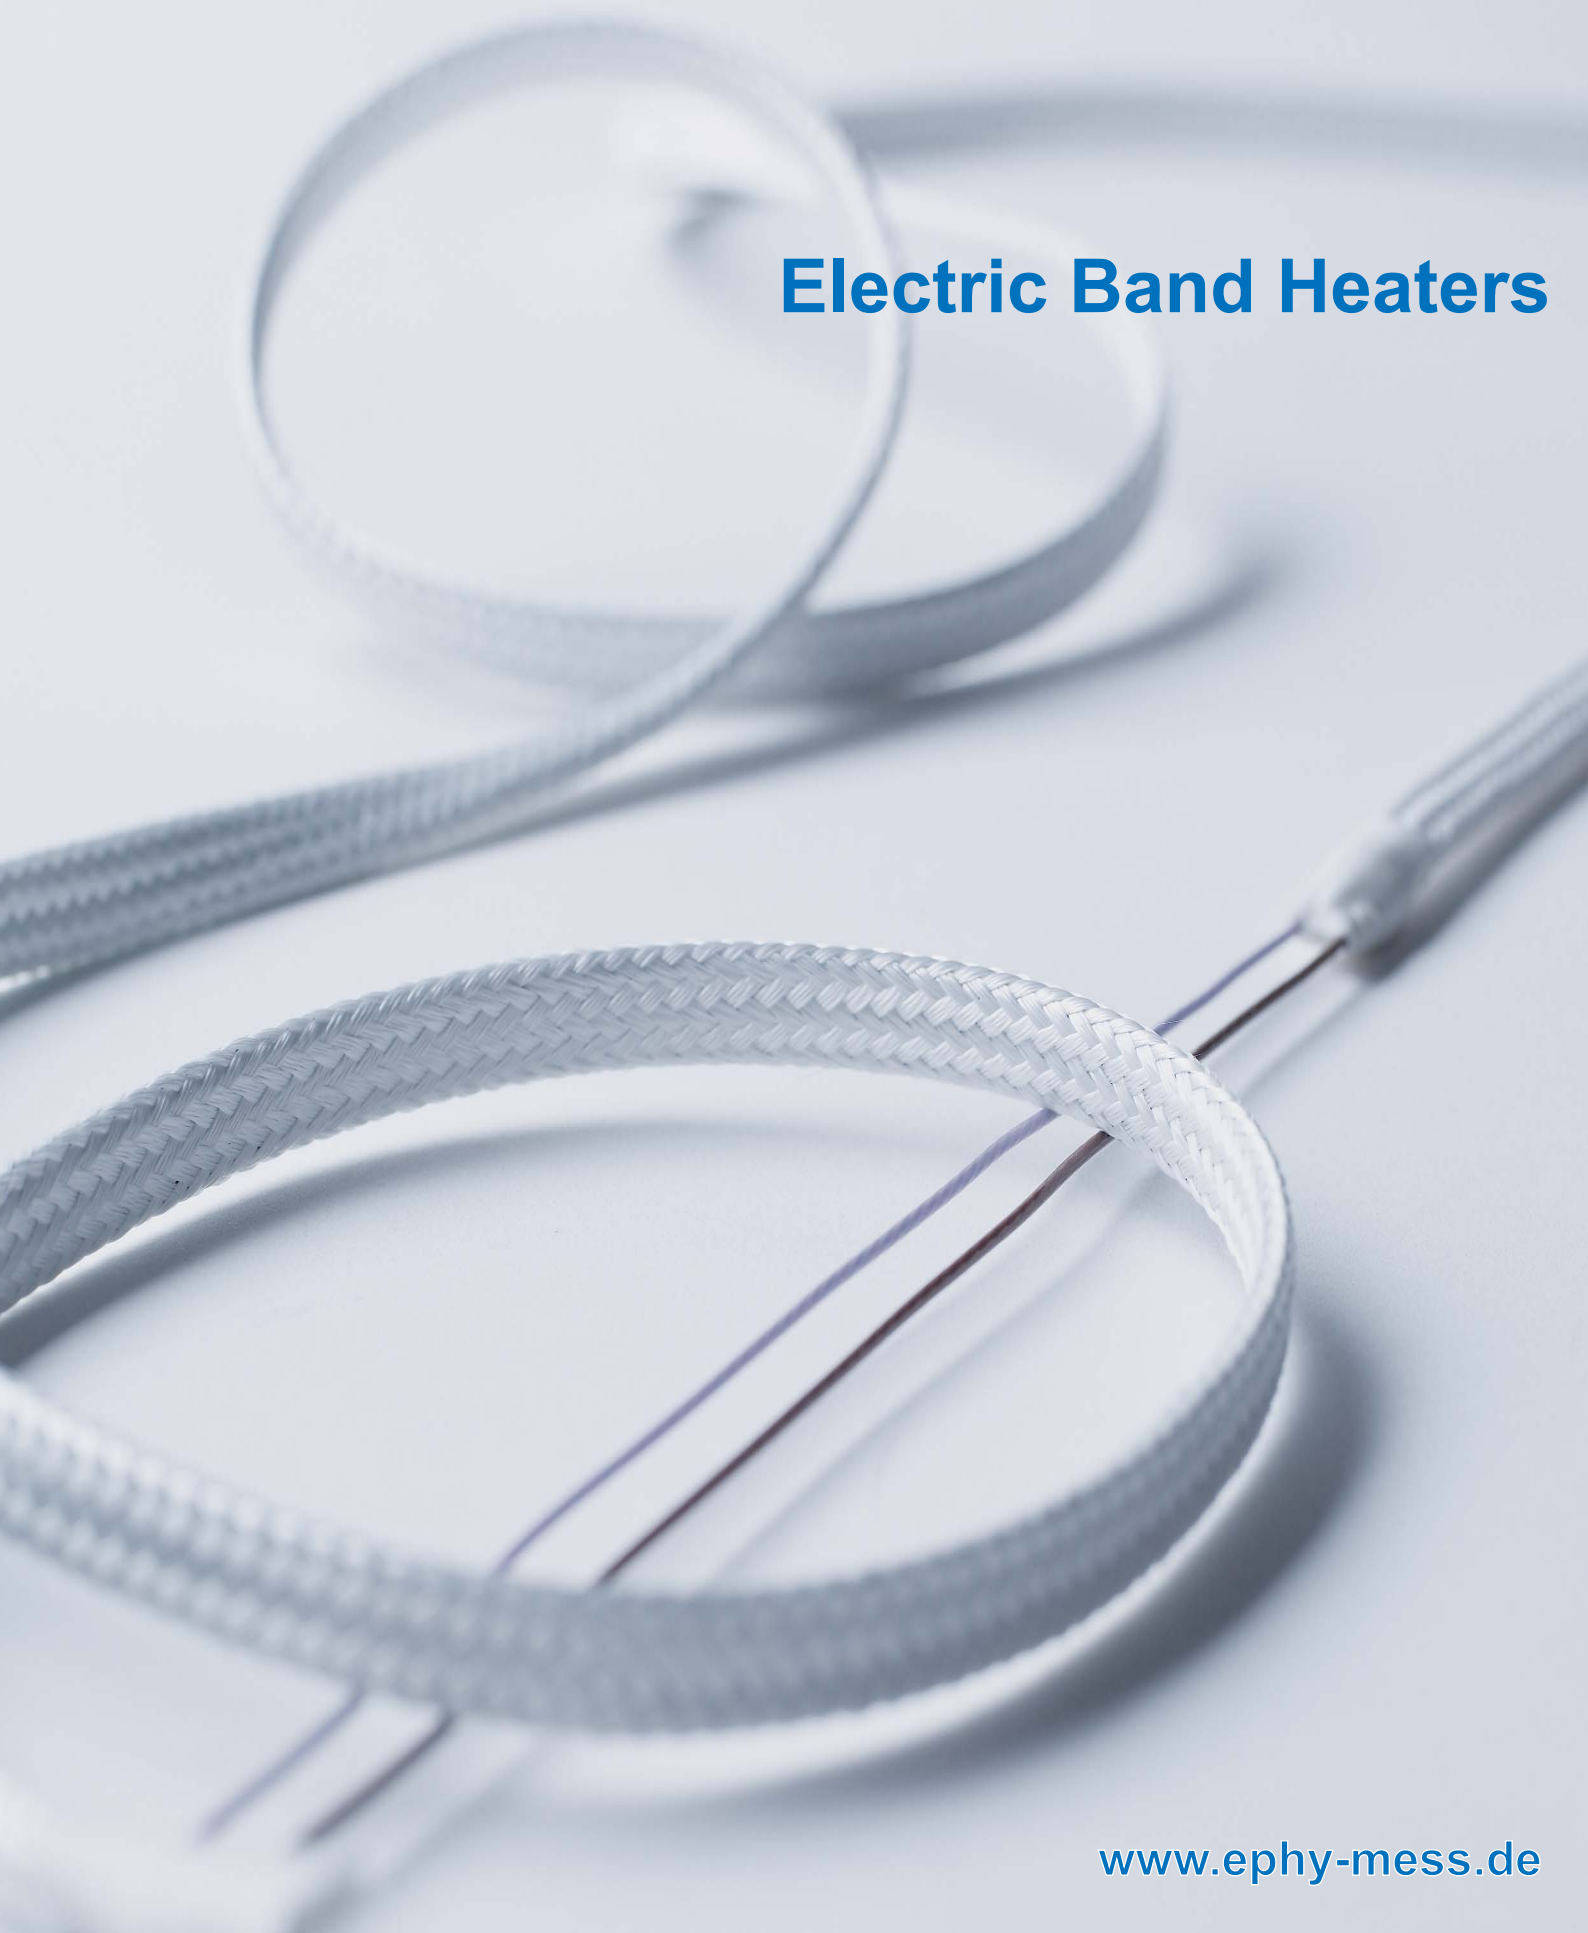



## Contents

<b>1.</b>	<b>Electric Band Heaters</b> .....	<b>2</b>
1.1	Electric Band Heater type Heat xx zGS .....	2
1.2	Table of deliverable standard versions type EM-Heat xx zGS .....	4
<b>2.</b>	<b>Electric Band Heater for hazardous areas</b> .....	<b>5</b>
2.1	Electric Band Heater with Ex e approval .....	5
2.2	Self Limiting Band Heater with Ex e approval .....	7



## FOREWORD / REMARKS

Electric Band Heaters as shown in this catalogue are for use in electric motors. They prevent in cold environment damage and the occurrence of condensate caused by frost. Types as shown are our standards. In our scope of supply we have one standard type electively with and without glass silk insulation and two versions for use in hazardous areas.

Customized versions in respect to power, heater band length and voltage are possible on request

## 1. Electric Band Heater

### 1.1 Electric Band Heater type EM Heat xxx zGS

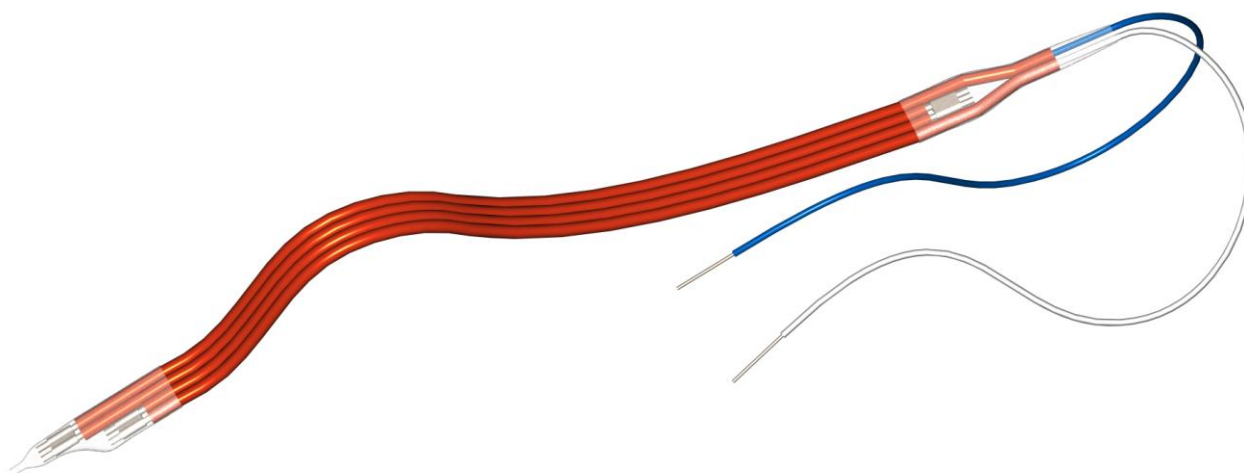


Fig. 1: Heat 27W oGS - 230V -0,29 - 500

#### Specification

Electric band heater HEAT xxx zGS

Order code:

*HEAT xxx zGS - U - HL - KL*

<i>xxx</i>	=	power in [W]
<i>z</i>	=	m with
<i>z</i>	=	o without
<i>GS</i>	=	glass silk tube
<i>U</i>	=	operating voltage [V]
<i>HL</i>	=	length of the heating band [m]
<i>KL</i>	=	length of the supply line [mm]

#### Construction

Resistance wire of CuNi or NiCr alloy looped on glass silk according to DIN 0254, with silicon insulated.  
Electively with or without additional glass silk insulation  
Fix connected supply line insulated with Teflon.

#### Insulation heating wire

Silicone



<b>Dimension</b>	mGS	oGS
width*)	approx. 11mm	approx. 9.5mm
height*)	approx. 3.5mm	approx. 2.5mm
length:	<u>acc. table 1</u>	<u>acc. table 1</u>
*) heating band ends are thicker because of insulation		
<b>Temperature range</b>	-40° C ... +180°C	
<b>Glass silk tube</b>	electively <b>with*)</b> or <b>without</b> *) For VPI process it must be used a version with glass silk tube (mGS)	
<b>Operating voltage</b>	115V   230V   254V (other voltages on request)	
<b>Power</b>	<u>acc. tab. 1</u> (other power on request)	
<b>Dielectric strength</b>	2kV / AC 50Hz / 20sec.	
<b>Bending radius</b>	≥10mm	
<b>Supply line</b>	single litz wire, Teflon insulated	
Design	<u>acc.tab.1</u>	
Colour code	AWG 20/7 Cu. verz.	
Cross section	500mm	
Length (standard)	≥ 25N (litz wire/heating band)	
Tensile strength		
<b>Online inquiry</b>	<a href="http://www.ephy-mess.de/en/contact/contact-form/">http://www.ephy-mess.de/en/contact/contact-form/</a>	



## 1.2 Table of deliverable standard versions type HEAT xxx zGS

Voltage [V]	Power [W]	Length of heating band [m] ±5%	Color code of the supply line
230	12	0.26	grey/green
230	13	0.25	grey/orange
230	20	0.68	brown/brown
230	25	0.3	blue/green
230	25	0.43	blue/black
230	25	0.5	blue/brown
230	26	0.79	green/yellow
230	27	0.29	blue/white
230	40	0.68	blue/purple
230	40	1.01	blue/yellow
230	42	1.01	white/yellow
230	50	1.06	red/brown
230	65	1.47	green/white
230	67	1.47	green/brown
230	75	1.7	yellow/brown
230	76	2.3	yellow/yellow
230	77	0.7	blue/blue
230	100	1.7	black/green
230	100	1.85	black/brown
230	100	2.0	black/black
230	100	2.05	black/yellow
115	12	0.25	purple/brown
115	12.5	0.37	purple/black
115	12.5	0.25	white/brown
115	24	0.3	purple/grey
115	25	0.43	purple/purple
115	25	0.5	purple/green
115	27	0.5	green/green
115	39	1.01	purple/red
115	42	1.01	red/grey
115	45	0.72	red/black
115	50	1.06	purple/white
115	100	2.0	orange/green
115	115	1.7	orange/white
254	13	0.3	Blue/orange
254	22	0.43	blue/red
254	50	1.05	red/yellow
254	50	1.3	red/red

Tab. 1: deliverable standard versions



## 2. Electric Band Heater for hazardous areas

### 2.1 Electric Band Heater HEAT xxx with Ex e approval

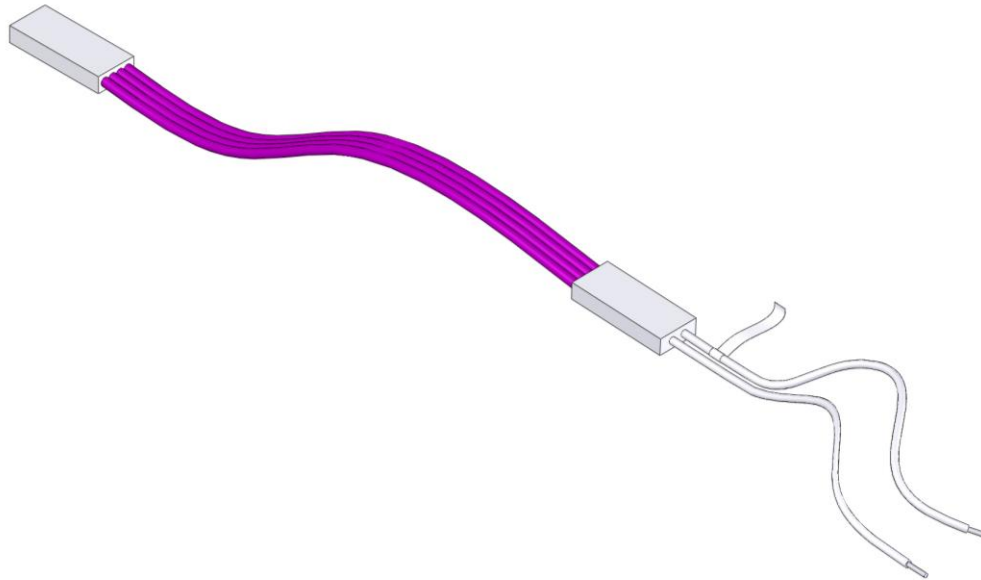


Fig. 2: EM-Heat 25 oGS – 230 -300 - 500 Ex

<b>Specification</b>	Electric band heater ATEX: HEAT xxx - SSH Electric band heater TR: PR-HEI-EX-HEAT-SSH-xxx	
Order code:	ATEX: HEAT xxx SSH - U - HL - KL TR: PR-HEI-EX-HEAT-SSH-xxx - U - HL - Exe - KL	
	xxx	= power in [W]
	U	= operating voltage [V]
	HL	= length of the heating band [m]
	KL	= length of the supply line [mm]
<b>Construction</b>	Resistance wire of CuNi or NiCr alloy looped on glass silk according to DIN 0254, with silicon insulated. Electively with or without additional glass silk insulation Fix connected supply line insulated with Teflon.	
<b>Type of protection</b>	ATEX: II 2G Ex eb IIC TR: Ex e IIU	
<b>Insulation heating wire</b>	Silicone	
<b>Dimension</b>	mGS	oGS
width*)	approx. 11mm	approx. 9.5mm
height*)	approx. 3.5mm	approx. 2.5mm
length:	<u>acc. table 1</u>	<u>acc. table 1</u>
*) heating band ends are thicker because of insulation		



<b>Temperature range</b>	-50°C ... +180°C
<b>Glass silk tube</b>	electively <b>with*</b> ) or <b>without</b> *) For VPI process it must be used a version with glass silk tube (mGS)
<b>Operating voltage</b>	≤ 230V (other voltages on request)
<b>Power</b>	8W ...100W
<b>Dielectric strength</b>	2kV / AC 50Hz / 20 sec.
<b>Bending radius</b>	≥10mm
<b>Supply line</b>	
Design	single litz wire, Teflon insulated
Colour code	WH/WH
Cross section	AWG 16/19 copper tinned.
Length (standard)	500mm
Tensile strength	≥ 25N (litz wire/heating band)

**Order key:**

*SSH xxx / HL (dxbxl) / KL*

SSH xxx	U	HL	KL	
				cable length in mm
				dimensions mm (d/b/l)
				supply voltage V
				power W



## 2.2 Self Limiting Band Heater with Ex e approval

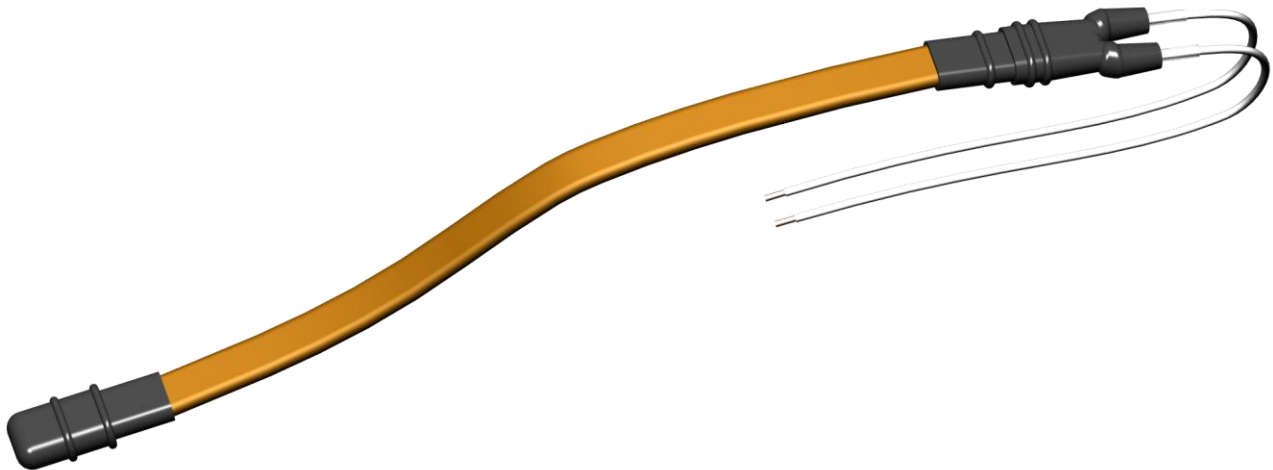


Fig. 3: Self Limiting Band Heater HEAT-SBSSH

### Specification

Self Limiting Band Heater ATEX: HEAT-SBSSH  
Self Limiting Band Heater TR: PR-HEI-EX-HEAT-SBSSH

Order code:

ATEX: HEAT - yyy - SBSSH - U - xx - HL - Exe - KL  
TR: PR-HEI-EX-HEAT-SBSSH-yyy - U - xx - HL - Exe - KL

yyy = power in [W]  
U = operating voltage [V]  
xx = heating power in W/m  
HL = length of the heating band [m]  
KL = length of the supply line [mm]

### Design

Parallel supply line, heating element of intermetallic plastic compound, shielding harness of solder plated copper wires, outer cover made of FEP, fix connected supply line

### Type of protection

ATEX: II 2G Ex eb IIC T3  
TR: 2 Ex e II T3 X

### Operating temperature

-40°C ... +150°C max. 210°C switched off

### Ambient temperature

up to 210°C switched off

### Operating voltage

230 V, 50 - 60 Hz

### Dielectric strength

2kV / AC 50Hz / 20 sec.





## Heating power


20 W/m SBSSH-xx\_20  
 30 W/m SBSSH-xx\_30  
 45 W/m SBSSH-xx\_45  
 60 W/m SBSSH-xx\_60

## Bending radius

≥ 25 mm (over the flat band side)

## Supply line

Design single litz wires or hose line  
 Color code acc. customer request  
 Cross section 1 mm<sup>2</sup>  
 Length (standard) 500mm  
 Tensile strength ≥ 25N (supply line/heating band)

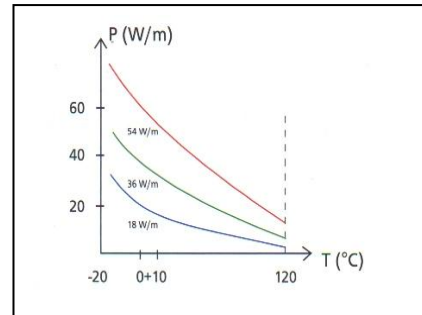

## Order Code:

SBSSH yyy	U	xx	HL	Ex e	KL	cable length in mm
					information regarding ATEX	
					dimensions in mm (d/b/l)	
					heating power in W/m	
supply voltage in V						
power in W						



**EPHY MESS**

Gesellschaft für Elektro-Physikalische Meßgeräte mbH



Berta-Cramer-Ring 1  
D-65205 Wiesbaden  
Tel.: 06122 / 9228-0  
Fax: 06122 / 9228-99  
[www.ephy-mess.de](http://www.ephy-mess.de)