

## Training 16 – Settings for Flow monitors - Delays

### 培训16 -设置流量监控器-延迟

Flow monitors SW118 and SW119 are quite special devices because they have some features all other flow monitors do not have.

流量监视器SW118和SW119是非常特殊的设备，因为它们有一些其他流量监控器没有的特性。

First of all they can be ordered for 115 V AC and 230 V AC input voltage. This is interesting for older facilities and measuring points which are located far away from any control cabinets and 24 V DC.


首先，他们可以订购115 V AC和230V AC交流输入电压。这对旧的设施和测量点很有趣，它们远离任何控制柜和24V直流电。

Second of all SW118 and SW119 feature some special delay options. These delay options can be set by the customer who can choose between three settings:

其次，SW118和SW119有一些特殊的延迟选项。这些延迟选项可由可在三个设置之间选择的客户设置：

#### Without delay:



不延迟：

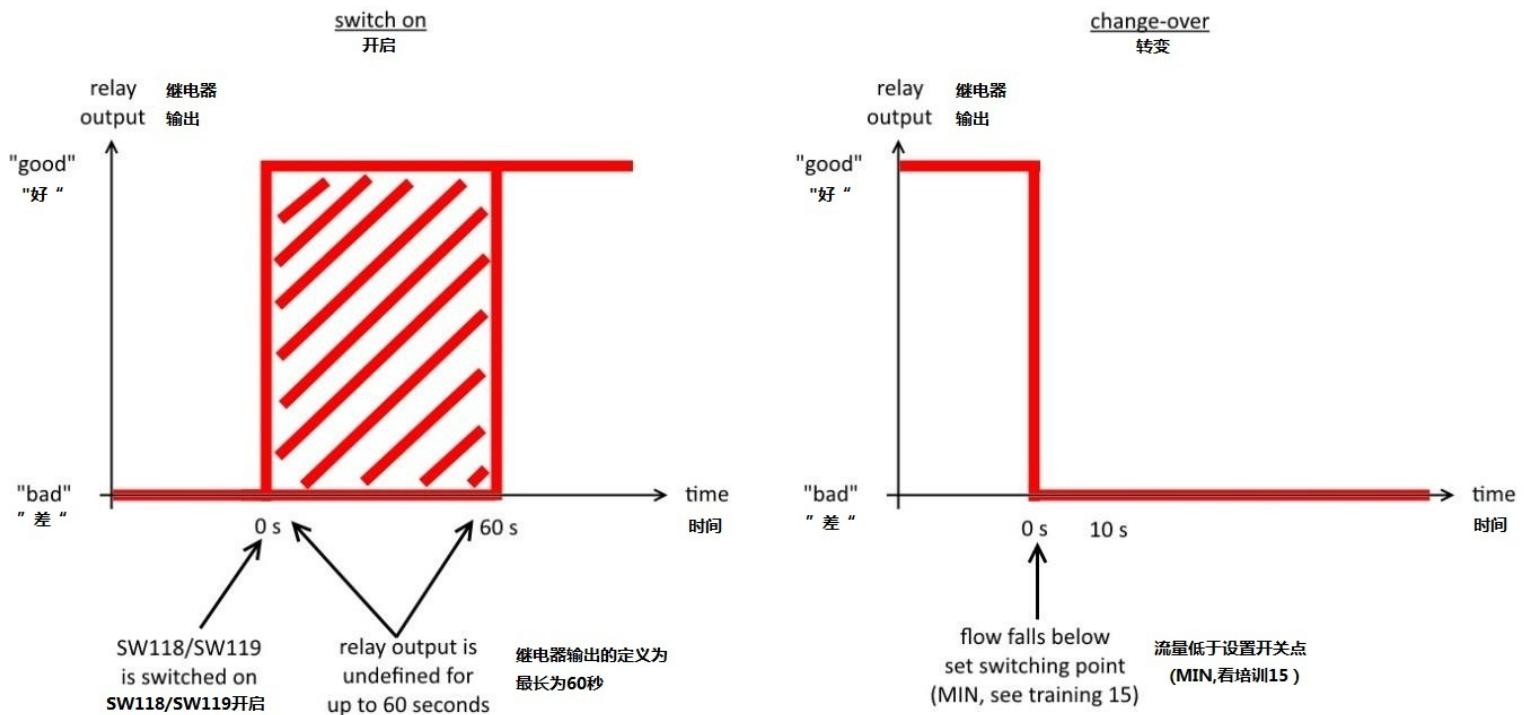

Please see also next page

请也看下一页

**Switch on delay 60 seconds:**  
开关延迟60秒:

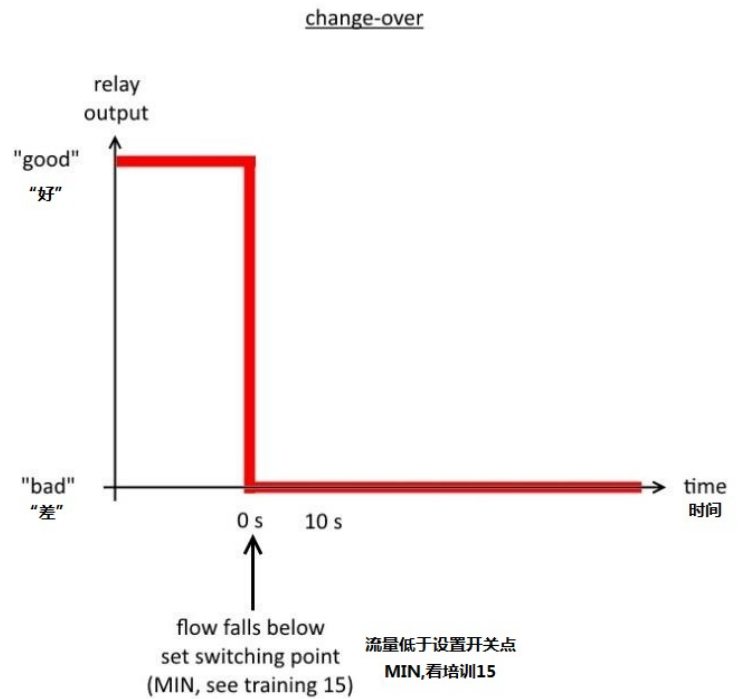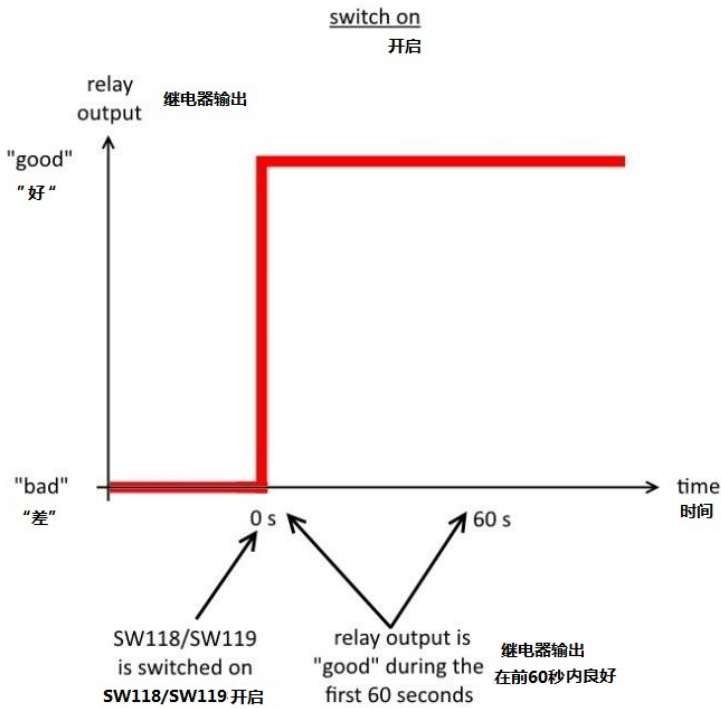

**Change-over delay 10 seconds:**  
转换延迟10秒:

